


DESCRIPTION

- Protection system IP 67
- Flush mounted linear lighting fixture
- Entirely made of aviation aluminum 6063
- Fully encapsulated
- Power-LED cold white, warm white, neutral white, RGB, RGBW
- Operating mode: constant voltage and DMX512 control available
- Installation without any gap of numerous fixtures possible, line of light without any gaps
- Anti skid toughened safety glass (ESG)-withstands loads of up to 1000KG
- Connection with special cable connectors (plug and socket)
- All optics are pre-set at 5° tilted and glare control

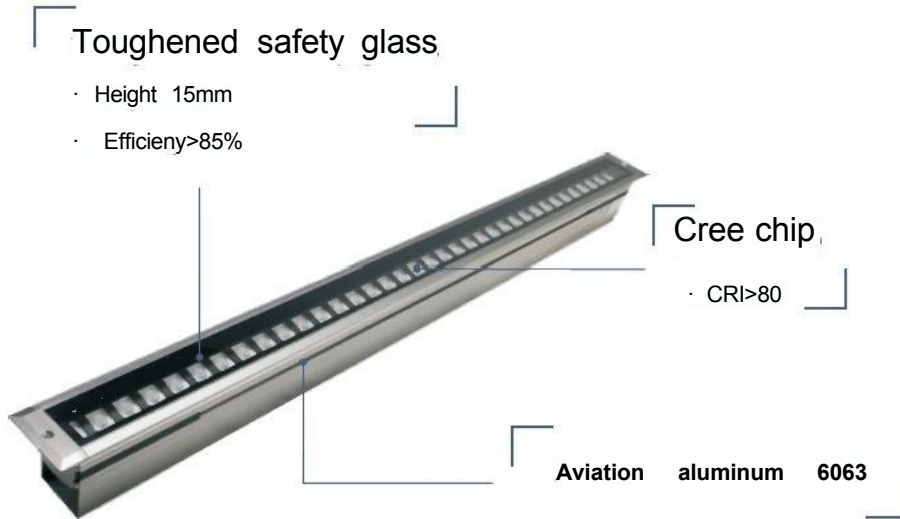

IP 67

IK 09

AVIATION
ALUMINUM
6063

2700K
3000K
4000K
6000K

RGBW

FC

CE



For linear effect and orientation lighting in public areas and sidewalks

Technical Parameters

Power Consumption	Max. 24W	Max. 36W	Max. 48W
Qty of LED	12PCS	18PCS	24PCS
LED Type	CREE, ORSAM, LUMILEDS		
LED Source Luminous Efficacy	130Lm/w (2700K), 140Lm/w (3000K), 150Lm/w (4000K), 150Lm/w (5000K)		
CRI	Ra ≥ 80		
CCT/Color	2700K, 3000K, 4000K, 6000K, RGBW		
Lumen Maintenance	50,000 hrs L70 at 25°C		
Beam Angle	10°		
Input Voltage	24VDC, 48VDC		
Control	On/OFF, DMX512, DALI		
Material	Aluminum Body & Clear Tempered Glass		
Size	610×85×101mm	910×85×101mm	1210×85×101mm
Weight	3.34Kg	5.1Kg	6.67Kg
Mech impact protection	IK10		
Protection	IP67		
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F		
Storage Temperature	-30°C ~ 80°C / -22°F ~ 176°F		
Certification	FCC, CE, ROHS, CCC		

Dimensions

Unit: mm

